

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
14 February 2002 (14.02.2002)


PCT

(10) International Publication Number  
WO 02/13548 A2

- (51) International Patent Classification<sup>7</sup>: H04Q 7/00 (74) Agents: VOLPE, Anthony, S. et al.; Volpe and Koenig, P.C., Suite 400, One Penn Center, 1617 John F. Kennedy Boulevard, Philadelphia, PA 19103 (US).
- (21) International Application Number: PCT/US01/24336
- (22) International Filing Date: 3 August 2001 (03.08.2001) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/223,405 4 August 2000 (04.08.2000) US  
60/230,123 5 September 2000 (05.09.2000) US
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: INTERDIGITAL TECHNOLOGY CORPORATION [US/US]; 300 Delaware Avenue, Suite 527, Wilmington, DE 19801 (US).
- (72) Inventors: DICK, Stephen, G.; 61 Bobann Drive, Nesconset, NY 11767 (US). ZIERA, Eldad; 239 West Neck Road, Huntington, NY 11743 (US).
- Published:  
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: PERIODIC CELL SEARCH

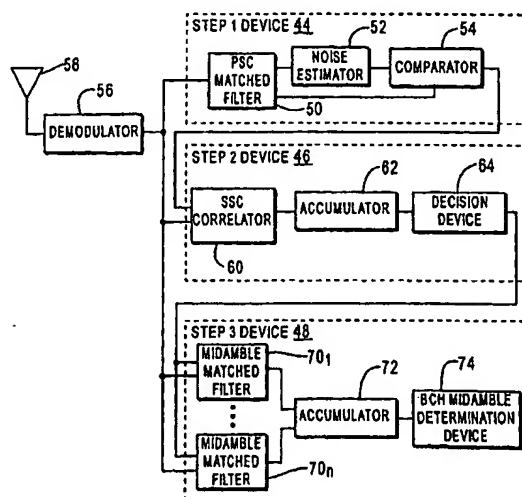

(57) Abstract: A wireless communication system which comprises a plurality of base stations and a user equipment. Each base station transmits a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel. A transmitted power level of the PSC and midamble code are at a common fixed ratio for each base station. The user equipment (UE) is capable of conducting cell search and includes a receiver for receiving said PSCs, a signal power measuring device for measuring the power level of received PSCs and identifying a frame timing of received PSCs which exceed a power threshold, and a processor for analyzing data signals received in the primary synchronization channel associated with the PSC with the highest power level of the received PSCs with a threshold exceeding power level. The processor also synchronizes or maintains synchronization with the base station associated with the highest PSC, the data signals including secondary synchronization codes.

**WO 02/13548 A2**



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

[0001] PERIODIC CELL SEARCH

[0002] This application claims priority to Provisional Patent Application No. 60/223,405, filed August 4, 2000 and Provisional Patent Application No. 60/230,123, filed September 5, 2000.

[0003] BACKGROUND

[0004] The present invention relates to wireless communication systems. More specifically, the present invention relates to cell search in time division duplex communication systems using code division multiple access.

[0005] Cell search is a process where a wireless user, user equipment (UE 10), synchronizes with a base station of a cell prior to transmission of traffic data, such as voice data. Figure 1 is an illustration of a UE 10 in a wireless communication system. Upon activation, the UE 10 is unaware of its location. The UE 10 selects a cell 12<sub>1</sub> out of a plurality of cells 12<sub>1</sub> to 12<sub>n</sub> (12) and its associated base station 14<sub>1</sub> for communication. Prior to initiating communication, the UE 10 synchronizes both timing and code set to the selected base station 14<sub>1</sub>.

[0006] The cell search process involves three steps. In the first step (step 1), the UE 10 identifies nearby base stations 14<sub>1</sub> to 14<sub>n</sub> (14). Each base station 14 transmits a primary synchronization code (PSC) in a primary synchronization channel (PSCH).

[0007] In a typical time division duplex (TDD) communication system using code division multiple access (CDMA), the PSCH resides in either one timeslot, for case one, or two timeslots for case two, of a fifteen timeslot frame. In case one, the

-2-

PSCH is transmitted in a timeslot K out of the fifteen timeslots. In case two, the PSCH is transmitted in one of two timeslots, K and K + 8. To distinguish between the different base stations 14, each base station 14 transmits its PSC in the PSCH with a particular time offset,  $t_{\text{OFFSET}}$ , from the timeslot boundary.

[0008] In step 1, the UE 10 looks for transmitted PSCs from the base stations 14. The UE 10 looks at the one or two PSCH timeslots for received PSCs. Since the PSC is typically unmodulated, such as an unmodulated 256 chips, the search can be performed by looking for peaks in a match filter output over the timeslot(s). Each peak is a potential candidate base station 14 for synchronization.

[0009] In step 2, information about each cell is determined, such as the cell's code set,  $t_{\text{OFFSET}}$ , the frame index number within the interleaving period of two frames and the timeslot of the cell's transmitted PSC (for case 2). To determine each cell's information, the UE 10 looks for transmitted secondary synchronization codes (SSCs) transmitted along with each PSC. At each peak, the UE 10 searches for transmitted SSCs. The SSCs may be modulated with data. Based on each base station's detected SSCs and the modulated data, the UE 10 ascertains the cell information.

[0010] In step 3, the UE 10 determines the base station 14<sub>1</sub> for synchronization. For this determination, the UE 10 monitors the broadcast channel (BCH) of the primary common control physical channel (P-CCPCH) for transmitted midambles for each of the potential base stations 14 for synchronization. The base station 14<sub>1</sub> having the midamble with the highest received power is selected as the base station 14 for synchronization.

-3-

[0011] To implement this cell search procedure, a tradeoff between complexity and synchronization time exists. To speed up synchronization, matched filters searching all the differing cells' SSCs and midambles may be used. Alternately, fewer reconfigurable matched filters may be used over multiple frames. Using multiple frames, increases the synchronization time but reduces the number of matched filters and other cell search components.

[0012] Accordingly, it is desirable to have alternate approaches for cell search.

[0013] SUMMARY

[0014] A wireless communication system which comprises a plurality of base stations and a user equipment. Each base station transmits a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel. A transmitted power level of the PSC and midamble code are at a common fixed ratio for each base station. The user equipment (UE) is capable of conducting cell search and includes a receiver for receiving said PSCs, a signal power measuring device for measuring the power level of received PSCs and identifying a frame timing of received PSCs which exceed a power threshold, and a processor for analyzing data signals received in the primary synchronization channel associated with the PSC with the highest power level of the received PSCs with a threshold exceeding power level. The processor also synchronizes or maintains synchronization with the base station associated with the highest PSC, the data signals including secondary synchronization codes.

[0015] BRIEF DESCRIPTION OF THE DRAWING(S)

[0016] Figure 1 is an illustration of a user equipment (UE) in a wireless communication system.

[0017] Figure 2 is a flow chart for cell search.

[0018] Figure 3 is a simplified diagram of a base station for use in cell search.

[0019] Figure 4 is a simplified diagram of an initial cell search system of a UE.

[0020] Figure 5 is a graph of an output from a PSC matched filter.

[0021] Figure 6 is a flow chart of cell search using assigned cell time slot information.

[0022] Figure 7 is a flow chart for base station synchronization using cell search information.

[0023] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

[0024] Figure 2 is a flow chart for cell search. Figure 3 is a simplified diagram of a base station 14 for use in cell search. The base station 14 includes a PSC generator 28 and multiple SSC generator and modulation devices  $30_1$  to  $30_n$  (30) for producing the PSC and modulated SSCs at the appropriate timeslot and frame timing associated with the base station 14. A BCH spreading and training sequence insertion device 32 produces a BCH communication burst. The BCH burst is time multiplexed in the timeslot of the BCH and with the appropriate midamble of the base station 14. Amplifiers 34,  $36_1$  to  $36_n$ , 38 associated with each of the PSC, SSC and BCH control the transmission power level of each signal. For certain cell search features, each base

station's BCH and PSC transmission power levels are, preferably, set at the same fixed ratio (16). As a result, although the transmission power level of the BCH and PSC may vary cell to cell, the ratio of the transmission power level of the BCH and PSC within each cell 12 is fixed. However, for other cell search features the BCH/PSC fixed ratio is not necessary. The amplified PSC, SSC and BCH are combined by a combiner 40 and radiated by an antenna 42.

[0025] Figure 4 is a simplified diagram of a cell search system of a UE 10. Step 1 of the periodic cell search is performed by the step 1 device 44. For case one of a TDD/CDMA system, the step 1 device only searches a single timeslot and for case two, it searches two timeslots. Figure 3 shows one implementation of a step 1 device 44, although others may be used. The step 1 device 44 comprises a matched filter 50, a noise estimator 52, and a comparator 54. An antenna 58 receives radio frequency signals. After the received signal is demodulated to a baseband signal, such as by a demodulator 56, an input signal I is received and processed by the matched filter 50. The matched filter 50 is matched to the PSC. As illustrated in Figure 5, the output of the matched filter 52 will be a series of pulses which represent the magnitudes of the received PSC power for those cells detected by the matched filter 50.

[0026] The noise estimator 52, coupled to the matched filter 50 and the comparator 54, estimates the noise power of the PSCH which contributes to the received input signal I. One possible noise estimator 52 calculates the power of every point received. The estimator 52 then averages the noise power of these points and outputs this value to the comparator 54.

-6-

[0027] The outputs from the matched filter 50 and the noise estimator 52 are received by the comparator 54. The comparator 54 determines which of the pulses are likely cell detections. One comparator 54 uses the estimated noise power received from the estimator 52 in order to make this determination. The estimated noise power is used to generate a threshold value, K1. The predetermined value K1 is selected based on maintaining a predetermined false alarm rate for a PSC signal. One such value for K1 is twice the estimated noise power (i.e. 3dB above the noise power estimate) and another value is four times the noise power (i.e. six decibels above the noise power estimate). This false alarm rate may be fixed or determined on a case by case basis or even on a UE to UE basis.

[0028] The comparator 54 then compares each of the received PSCH pulses to the threshold. If the pulse is greater than the threshold, the comparator 54 designates it a cell detection and outputs its location in the frame to the step 2 device 46 (18). The comparator 54 also indicates the pulse having the highest received power. If a pulse is less than the threshold, the comparator ignores the detected power level, assuming it to be a noise spike. Referring back to Figure 5, the detections marked D1 and D2 illustrate detections that are above a calculated threshold, indicated by the thick horizontal line.

[0029] For best performance it is proposed that each base station's ratio of the BCH to the PSCH transmission power level shall be fixed. As a result, the PSCH with the highest received power should correspond to the midamble with the highest received power. Using this assumption, step 2 and step 3 are simplified.



-7-

[0030] Since each cell is assigned a specific time offset, the process may use the location in the frame of the detected PSC to infer the identity of the cell. For greater reliability of a decision, or if a priori cell information is not used, the process may perform Step 2. Figure 6 is a flow chart for inferring the cell identity using the detected PSC. The UE 10 has a prior knowledge of which cells is assigned a particular time offset. Based on the determined PSC time offset, the UE determines the cell information of the cell using that offset and may skip step 2 (19), shown in Figure 6. In step 3, along with detecting the BCH midamble, the UE 10 verifies the accuracy of its PSC detection. If the a priori information is not correct, it is assumed that either the PSC detection was a false detection or a cell is not associated with the a priori information.

[0031] The step 2 device 46, coupled to the step 1 device 44 and the step 3 device 48, receives the input signal I and location in the frame of each of the detected cells from the comparator 54. Using the location of the cell with the highest received PSC power, the step 2 device 46 determines that cell's SSCs to determine the cell information (20, 22). By using only the specific PSC locations, one per detected PSCH, step 2 is simplified. Demodulation of the SSC takes advantage of knowing the start time, derivable from the detected PSC. Then a simple correlation process, performed by a correlator 60, can be performed to derive the parameters conveyed by the SSC. The demodulation process can provide, as a by-product, a confidence level. This confidence level can be the magnitude of the correlation output corresponding to the selected SSC pattern. The SSC pattern is stored by an accumulator 62.

-8-

[0032] If the SSC determination process exceeds a confidence level, as determined such as by a decision device 64, there is no need to accumulate additional slot information. The confidence level may be a threshold, such as  $K_2$ . If the confidence level is not exceeded, the accumulator 62 adds subsequent frame information noncoherently until a confidence level is reached or the frame count exceeds a certain value. After the confidence level is reached, the received SSCs are determined by the decision device 64. Using the detected SSCs and the data modulated on them, cell information, such as the code group,  $t_{\text{OFFSET}}$ , the frame index number and the timeslot of the cell's transmitted PSC (for case 2), is determined. If the confidence level is not exceeded or the SSCs are not consistent with allowed SSC combinations, the original PSC detection is assumed to be a false detect and the PSC with the next highest received power level is processed.

[0033] Using the cell information from either the time location of the PSC or the output of step 2, the step 3 device 48 determines the BCH midamble and primary scrambling code of that cell. The code group set determined in step 2 is associated with a set of midamble codes, such as four midamble codes. The input signal  $I$  is correlated, such as by matched filters  $70_1$  to  $70_n$  (70), with each midamble code of the set during the BCH. The correlations may be accumulated by an accumulation device 72 over a predetermined number of frames. Based on the accumulated correlations, the BCH midamble for that cell is determined by a BCH midamble determination device 74. Using the determined midamble, the cell's scrambling code is determined. Since only one cell's potential midamble codes are searched, step 3 is also simplified.

Accordingly, the complexity of the step 3 hardware is simplified or the step 3 processing time is reduced. Using the cell information from step 2 and the determined scrambling code of step 3, the UE 10 communicates with the selected base station 14 (26).

[0034] Additionally, cell search information may be used for synchronization of the timing between base stations 14. Although the cell search procedure as previously described may be used for base station synchronization, other cell search approaches may be used for base station synchronization. Figure 7 is a flow chart for base station synchronization using cell search information from a UE 14.

[0035] Using a step 1 device 44, the locations of received PSCs are determined (76). Using the step 2 device 46, the SSCs for each PSC and that cell's time offset and timeslot are determined (78). Preferably, each set of SSCs are passed through a confidence test (80). SSC sets failing the confidence test are discarded. One confidence test compares the received power of the SSCs. The SSC having the highest received power is compared to the second highest received power. If the second highest is not within a specified percentage of the first highest, that PSC detection is discarded.

[0036] Since cells 12 transmit PSCs with different time offsets and in different timeslots, the PSC locations are adjusted to compensate (82). Each received cell's adjusted PSC location simulates each cell transmitting the PSC at a same time reference with respect to its own timing. To illustrate, the location of two cell's PSCs are adjusted to simulate each cell transmitting the PSC at the start (no time offset) of

-10-

slot 0. The time of arrival (TOA) of each PSC as adjusted is determined (84). The TOA information is then used to adjust the base station timing (86).

[0037] One approach to synchronize the base station timing uses time distance of arrival (TDOA). The TDOA between each cell pair is determined. Since radio waves travel at the speed of light, using the distance between each cell's base station 14 and the UE 10, the TDOA of perfectly synchronized cells is determined. The UE/base station distance may be known, if the UE 10 is at a fixed location. The UE/base station distance may also be determined by geolocation. By determining the difference between the measured TDOA and the perfectly synchronized TDOA, a timing error is determined. Using the timing error, the radio network controller can adjust a timing of the out of synch base stations 14.

[0038] Since base station synchronization does not have to be performed at the same time as cell search, each cell's PSC location, time offset and timeslot information can be gathered over many frames. As a result, additional hardware is not required to perform base station synchronization. Furthermore, by using signals already transmitted by each cell, such as the PSC and SSCs, no further utilization of radio resources is required for base station synchronization.

[0039] The TDOA calculation is preferably performed at the radio network controller, although it may be performed at the UE 10 or node-B. For each detected PSC, the base station information of that PSC is determined, such as code group,  $t_{\text{OFFSET}}$ , the frame index number, the timeslot of the transmitted PSC, the received power and the time of arrival relative to the UE's timing. The time of arrival of each

-11-

PSC is adjusted based on its determined  $t_{\text{OFFSET}}$  and timeslot. The time of arrival and other cell information are sent to the radio network controller to adjust the base station timing.

[0040] To initiate UE time of arrival measurements, the radio network controller may tell the UE 10 to measure a specified base station 14. After the UE 10 measures the TOA of the specified base station 14, it relays the information to the RNC to synchronize the base stations 14. The specified base station 14 may be distinguished at the UE 10 by its associated SSCs. The RNC may also direct the UE 10 to take TOA measurements on all its neighbors. The UE 10 relays all detected neighbors information to the RNC. Preferably, the UE 10 sends a confidence level with each cell's information. One confidence level takes a ratio of the received power of the PSC and compares it to the received power of the SSCs. If the received power levels are close, it indicates a high confidence in the detection.

[0041] The RNC takes the cell information and generates a measurement report. The measurement report may contain measurements from one or many UEs 10. The confidence levels are used to weight information for each cell. Accordingly, measurements with a high confidence are weighted higher than low confidence measurements. The history of these measurements can be tracked over time and stored in the report. A Kalman filter can be used to weight the stored information for use in synchronizing the base stations 14.

\*

\*

\*

-12-

## CLAIMS

What is claimed is:

1. A user equipment (UE) capable of conducting cell search in a wireless communication system having a plurality of base stations which each transmit a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel, a transmitted power level of the PSC and the midamble code being at a common fixed ratio for each of said base stations, the UE comprising:

a receiver for receiving said PSCs;

a signal power measuring device for measuring the power level of received PSCs and identifying a frame timing of received PSCs which exceed a power threshold; and

a processor for analyzing data signals received in the primary synchronization channel associated with the PSC with the highest power level of the received PSCs with a threshold exceeding power level and synchronizing or maintaining synchronization with the base station associated with said highest PSC, said data signals including secondary synchronization codes.

2. The user equipment of claim 1 wherein said signal power measuring device comprises:

-13-

a matched filter matched to the common PSC for measuring each PSC received from said plurality of base stations;

a noise estimator which determines the noise power received from each transmission of said plurality of base stations; and

a comparator for determining the power threshold and comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of said highest PSC.

3. The user equipment of claim 2 wherein said processor comprises:

a SSC processor responsive to said frame timing output from said signal power measuring device which detects said secondary synchronization codes in said primary synchronization channel to identify the base station associated with the frame timing to extract base station information which includes the midamble codes; and

a synchronization processor responsive to said SSC processor which detects a primary scrambling code.

4. The user equipment of claim 3 wherein said base station information further includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

-14-

5. A wireless communication system comprising:

a plurality of base stations which each transmit a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel, a transmitted power level of the PSC and midamble code being a common fixed ratio for each of said base stations; and

a user equipment (UE) capable of conducting cell search, comprising:

a receiver for receiving said PSCs;

a signal power measuring device for measuring the power level of received PSCs and identifying a frame timing of received PSCs which exceed a power threshold; and

a processor for analyzing data signals received in the primary synchronization channel associated with the PSC with the highest power level of the received PSCs with a threshold exceeding power level and synchronizing or maintaining synchronization with the base station associated with said highest PSC, said data signals including secondary synchronization codes.

6. The system of claim 5 wherein said signal power measuring device comprises:

a matched filter matched to the common PSC for measuring each PSC received from said plurality of base stations;



-15-

a noise estimator which determines said power threshold based upon the noise power received from each transmission of said plurality of base stations; and

a comparator for determining the power threshold, comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of the said highest PSC.

7. The system of claim 6 wherein said processor comprises:

a SSC processor responsive to said frame timing output from said signal power measuring device which detects said secondary synchronization codes in said primary synchronization channel to identify the base station associated with the frame timing to extract base station information which includes the midamble codes; and

a synchronization processor responsive to said SSC processor which detects a primary scrambling code.

8. The system of claim 7 wherein said base station information further includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

9. A method of cell search in a wireless communication system having a plurality of base stations and a user equipment (UE), the method comprising:

each of said plurality of base stations:

-16-

transmitting a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a frame; and

transmitting a midamble code in a broadcast channel, whereby a transmission power level of the midamble code and the PSC is at a same fixed ratio for each of said base stations; and

at the UE:

receiving said PSCs;

measuring the power level of received PSCs;

identifying a frame timing of the PSC with the highest power level of the received PSCs which exceed a power threshold;

analyzing data signals received in the primary synchronization channel having received PSCs with a threshold exceeding power level, said data signals including secondary synchronization codes; and

synchronizing or maintaining synchronization with the base station associated with said highest PSC.

10. The method of claim 9 further comprising the steps of:

determining said power threshold based upon the noise power received from each transmission of said plurality of base stations;

comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of said highest PSC;

-17-

detecting said secondary synchronization codes in said primary synchronization channel to identify the base station associated with the frame timing to extract base station information which includes said midamble codes; and

detecting a primary scrambling code.

11. The method of claim 10 wherein said base station information includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

12. A user equipment (UE) capable of conducting cell search in a wireless communication system having a plurality of base stations which each transmit a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel, a transmitted power level of the PSC and the midamble code being at a common fixed ratio for each of said base stations, the UE comprising:

a receiver for receiving said PSCs;

a signal power measuring device for measuring the power level of received PSCs and identifying a frame timing of the received PSCs which exceed a power threshold to extract base station information which includes the midamble codes; and

a processor for detecting a primary scrambling code associated with the received PSCs which exceed the power threshold and synchronizing or maintaining synchronization with the base station associated with one of said PSCs which exceed

-18-

the power threshold, whereby the ratio of the power threshold and the received power level of the midamble code associated with said one PSC exceeds said common ratio.

13. The UE of claim 12 wherein said signal power measuring device comprises:

a matched filter matched to the common PSC for measuring each PSC received from said plurality of base stations;

a noise estimator which determines said power threshold based upon the noise power received from each transmission of said plurality of base stations; and

a comparator for comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of the identified PSCs which exceed the power threshold.

14. The UE of claim 13 wherein the identity of the base station associated with received PSCs which exceed the power threshold is known to the UE based on said frame timing, said known identity being used to extract said midamble code.

15. The UE of claim 14 wherein said processor synchronizes to the base station associated with the highest power level of one of said PSCs which exceed the power threshold.

-19-

16. The UE of claim 15 wherein said base station information further includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

17. A method of cell search in a wireless communication system having a plurality of base stations and a user equipment (UE), the method comprising:

each of said plurality of base stations:

transmitting a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a frame; and

transmitting a midamble code in a broadcast channel, whereby a transmission power level of the midamble code and the PSC is at a same fixed ratio for each of said base stations; and

at the UE:

receiving said PSCs;

measuring the power level of received PSCs;

identifying a frame timing of the received PSCs which exceed a power threshold to extract base station information which includes the midamble codes;

detecting a primary scrambling code associated with the received PSCs which exceed the power threshold in response to said midamble codes; and

synchronizing or maintaining synchronization with the base station associated with one of said PSCs which exceed the power threshold, whereby the ratio

-20-

of the power threshold and the received power level of the midamble code associated with said one PSC exceeds said common ratio.

18. The method of claim 17 further comprising of the UE the steps of:  
determining said power threshold based upon the noise power received from each transmission of said plurality of base stations; and  
comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of the identified PSCs which exceed the predetermined power threshold.

19. The method of claim 18 wherein said UE synchronizes to the base station associated with the highest power level of one of said PSCs which exceed the power threshold.

20. The method of claim 18 wherein said base station information further includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

21. A wireless time division duplex communication system comprising:  
a plurality of base stations which each transmit a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel, a transmitted

-21-

power level of the PSC and the midamble code being at a common fixed ratio for each of said base stations; and

a UE comprising:

a receiver for receiving said PSCs;

a signal power measuring device for measuring the power level of received PSCs and identifying a frame timing of the received PSCs which exceed a power threshold to extract base station information which includes the midamble codes; and

a processor for detecting a primary scrambling code associated with the received PSCs which exceed the power threshold and synchronizing or maintaining synchronization with the base station associated with one of said PSCs which exceed the power threshold, whereby the ratio of the power threshold and the received power level of the midamble code associated with said one PSC exceeds said common ratio.

22. The system of claim 21 wherein said signal power measuring device comprises:

a matched filter matched to the common PSC for measuring each PSC received from said plurality of base stations;

a noise estimator which determines said power threshold based upon the noise power received from each transmission of said plurality of base stations; and

-22-

a comparator for comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of the identified PSCs which exceed the power threshold.

23. The system of claim 22 wherein the identity of the base station associated with received PSCs which exceed the power threshold is known to the UE based on said frame timing, said known identity being used to extract said midamble code.

24. The system of claim 23 wherein said UE synchronizes to the base station associated with the highest power level of one of said PSCs which exceed the power threshold.

25. The UE of claim 23 wherein said base station information further includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

26. A wireless time division duplex communication system comprising:  
a plurality of base stations which each transmit a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel, a transmitted power level of the PSC and the midamble code being at a common fixed ratio for each of said base stations; and



-23-

a UE comprising:

a means for receiving said PSCs;

a means for measuring the power level of received PSCs and identifying a frame timing of the received PSCs which exceed a power threshold to extract base station information which includes the midamble codes; and

a means for detecting primary scrambling code associated with the received PSCs which exceed the power threshold and synchronizing or maintaining synchronization with the base station associated with one of said PSCs which exceed the power threshold, whereby the ratio of the power threshold and the received power level of the midamble code associated with said one PSC exceeds said common ratio.

27. The system of claim 26 wherein said signal power measuring device comprises:

a means for determining said power threshold based upon the noise power received from each transmission of said plurality of base stations; and

a means for comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of the identified PSCs which exceed the power threshold.

28. The system of claim 27 wherein the identity of the base station associated with received PSCs which exceed the power threshold is known to the UE based on said frame timing, said known identity being used to extract said midamble code.

-24-

29. The system of claim 28 wherein said UE synchronizes to the base station associated with the highest power level of one of said PSCs which exceed the power threshold.

30. The UE of claim 28 wherein said base station information further includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

31. A wireless communication system comprising:

a plurality of base stations which each transmit a common primary synchronization code (PSC) in a primary synchronization channel at a different timing within a system frame, and a midamble code in a broadcast channel, a transmitted power level of the PSC and midamble code being a common fixed ratio for each of said base stations; and

a user equipment (UE) capable of conducting cell search, comprising:

a means for receiving said PSCs;

a means for measuring the power level of received PSCs and identifying a frame timing of received PSCs which exceed a power threshold; and

a means for analyzing data signals received in the primary synchronization channel associated with the PSC with the highest power level of the received PSCs with a threshold exceeding power level and synchronizing or maintaining

-25-

synchronization with the base station associated with said highest PSC, said data signals including secondary synchronization codes.

32. The system of claim 31 wherein said means for measuring comprises:  
a means for determining the noise power received from each transmission of said plurality of base stations; and  
a processing means for determining the power threshold, comparing said measured power levels of said received PSC with said threshold and outputting the frame timing of the said highest PSC.

33. The system of claim 32 wherein said means for analyzing comprises:  
a means for detecting said secondary synchronization codes in said primary synchronization channel to identify the base station associated with the frame timing to extract base station information which includes the midamble codes in response to said frame timing; and

a synchronization means responsive to said means for detecting for communicating with said base station using a primary scrambling code.

34. The system of claim 33 wherein said base station information further includes a time offset, frame index number, time slot of the transmitted PSC, received power, and time of arrival relative to the UE.

-26-

35. A method of time synchronizing a plurality of base stations in a wireless communication system, the system having a plurality of base stations which transmit a primary synchronization code (PSC) in a primary synchronization channel, wherein each base station's PSC is transmitted in a different timing within a system frame, and a midamble code in a broadcast channel, and a user equipment, said method comprising the steps of:

receiving said PSC for each of said plurality of base stations;

measuring a power level of received PSCs;

detecting a frame timing of said PSCs which have a power level greater than a power threshold;

identifying the base stations associated with the PSCs which exceed said power threshold and extracting base station information including a time offset and time slot of said identified base stations;

adjusting the frame timing of the PSC of said identified base stations in response to said time offset;

calculating a time of arrival (TOA) for each of said adjusted PSC's frame timing; and

adjusting a timing of said base station in response to said TOAs.

36. The method of claim 36 wherein the step of identifying the base stations includes the steps of :

-27-

detecting secondary synchronization codes (SSCs) in said primary synchronization channel; and

performing a confidence test on said SSCs.



37. The method of claim 37 wherein the step of adjusting said frame timing in response to said TOA includes the steps of :



calculating a time distance of arrival (TDOA) for each of said identified base stations using the TOA;

comparing said calculated TDOA to a stored TDOA; and

generating a timing error based on said comparison.

38. The method of claim 37 wherein a transmitted power level of the midamble code and the PSC being a common fixed ratio for each of said base stations.

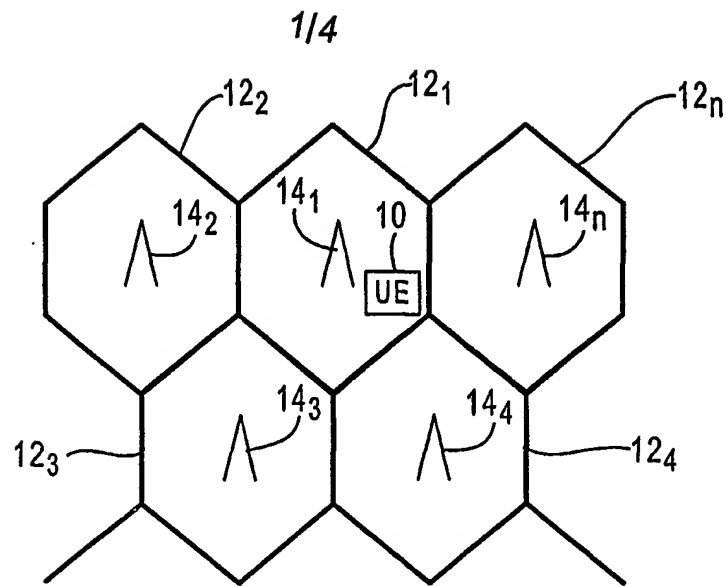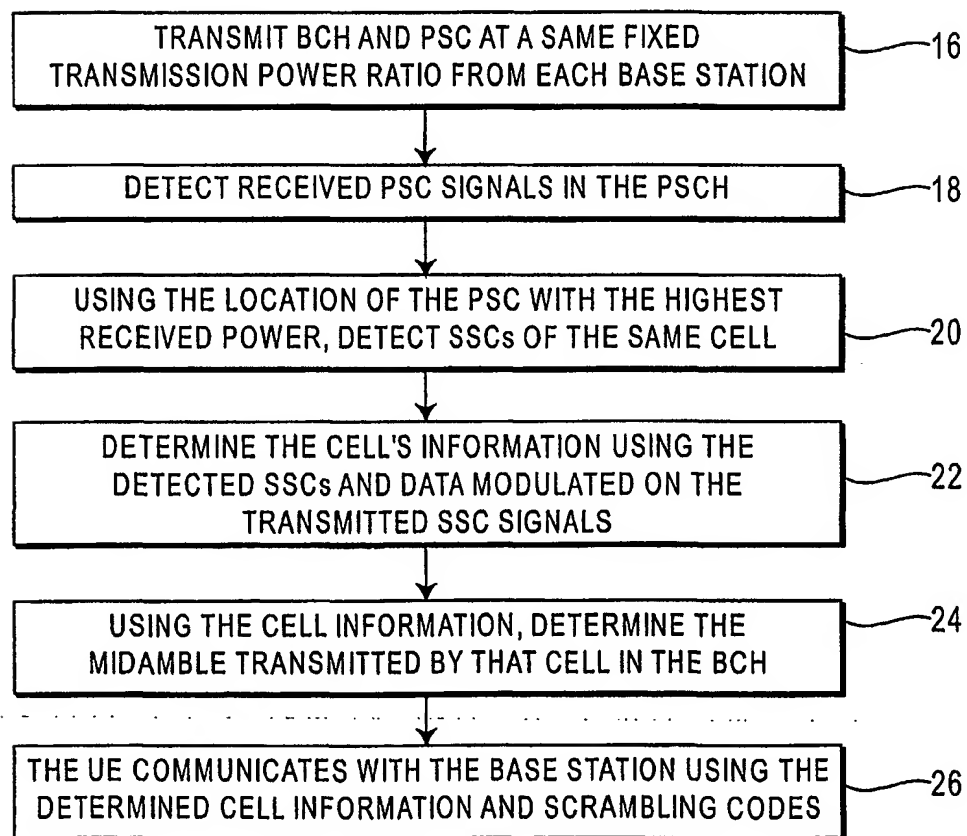**FIG. 1****FIG. 2**

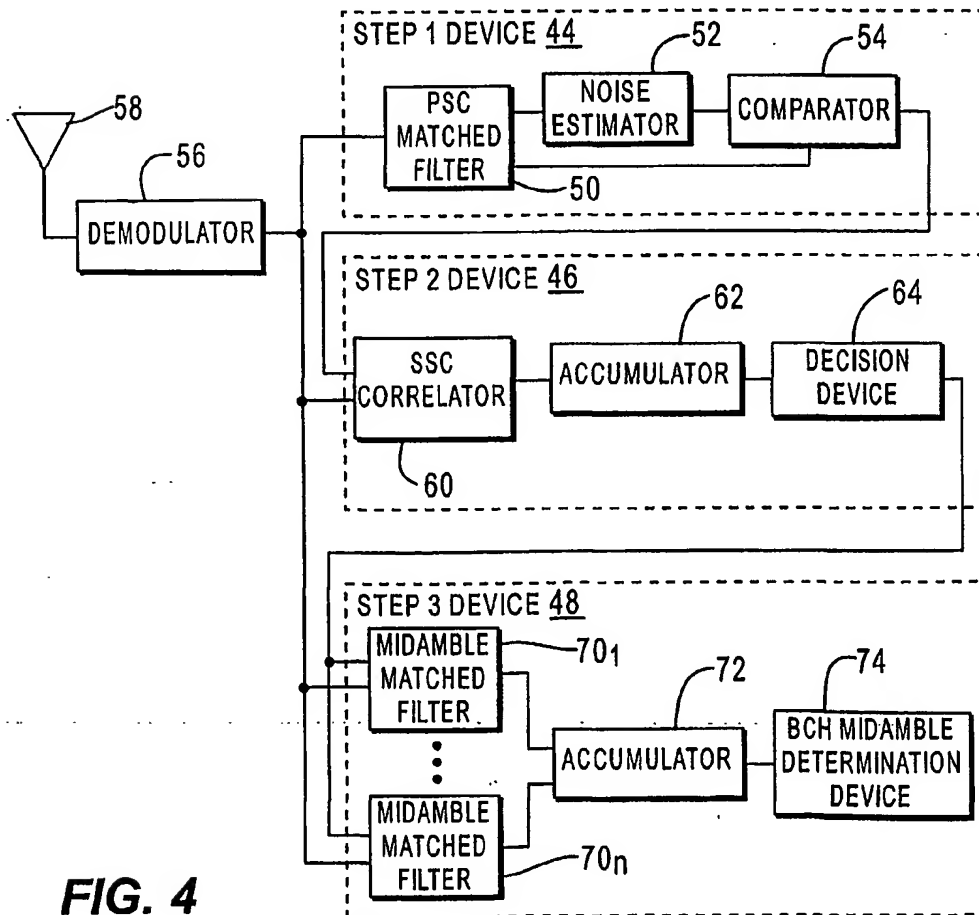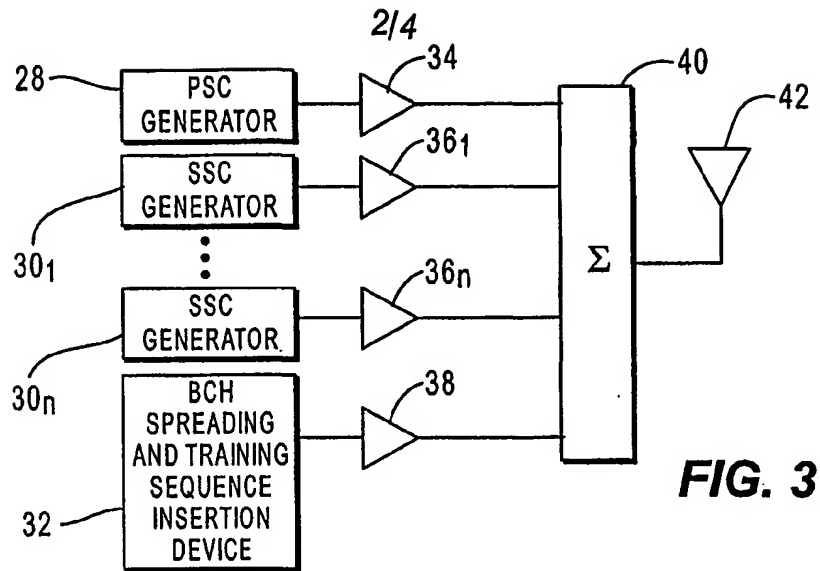

3/4



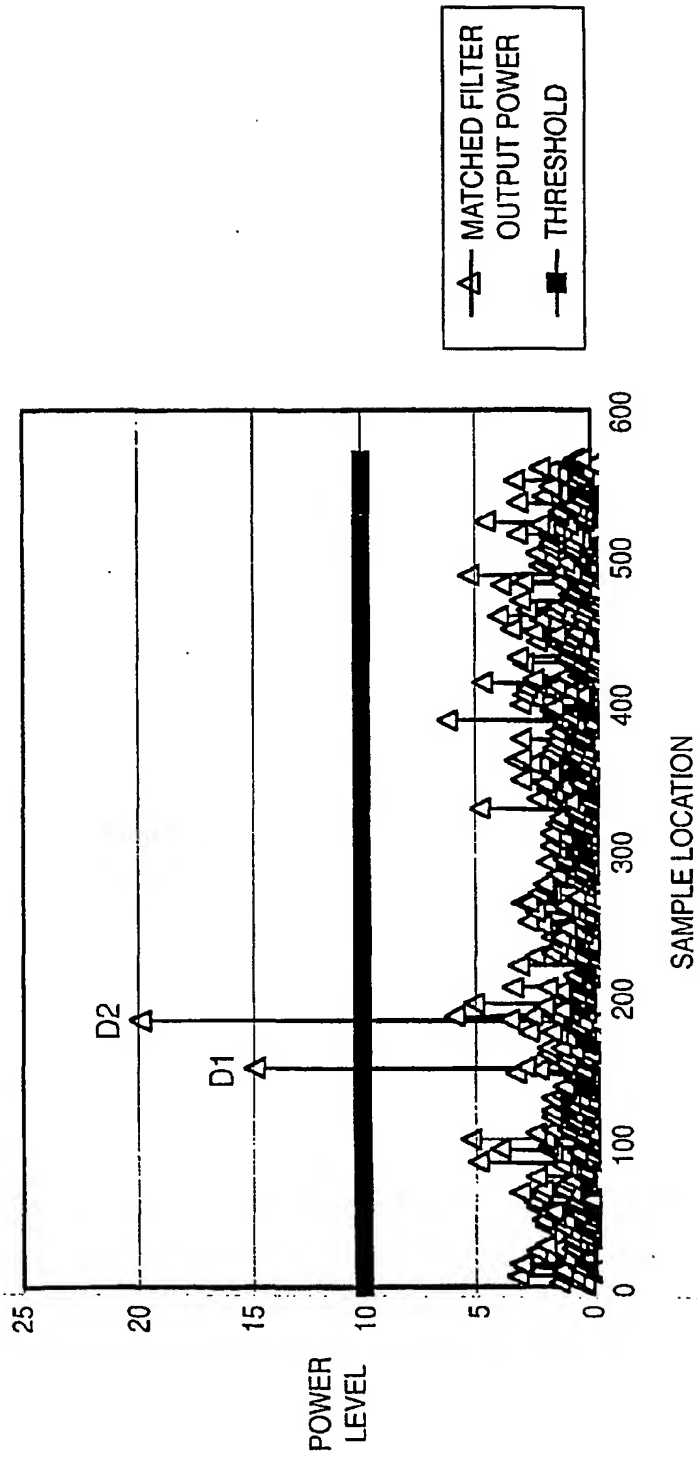


FIG. 5

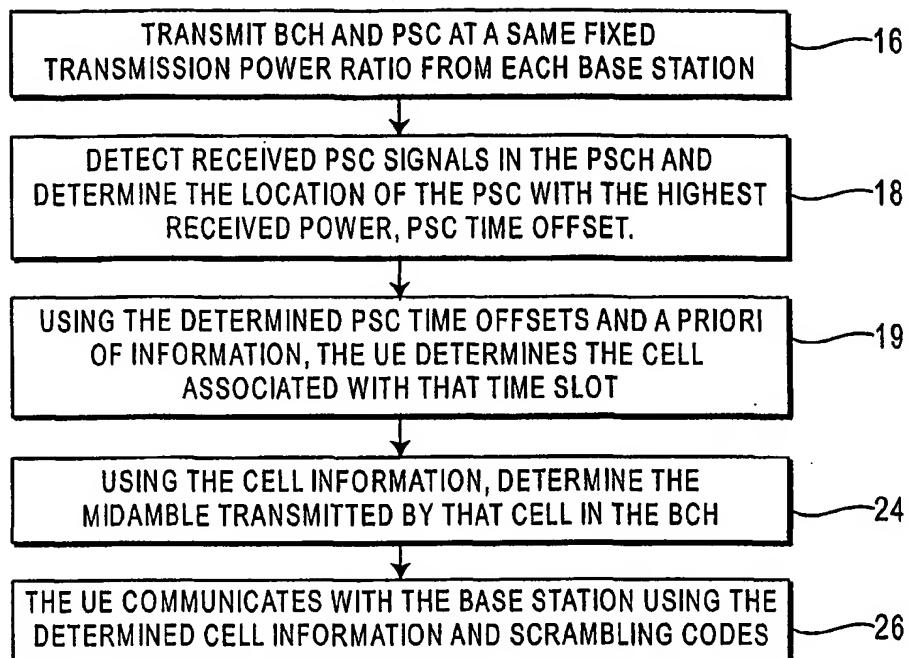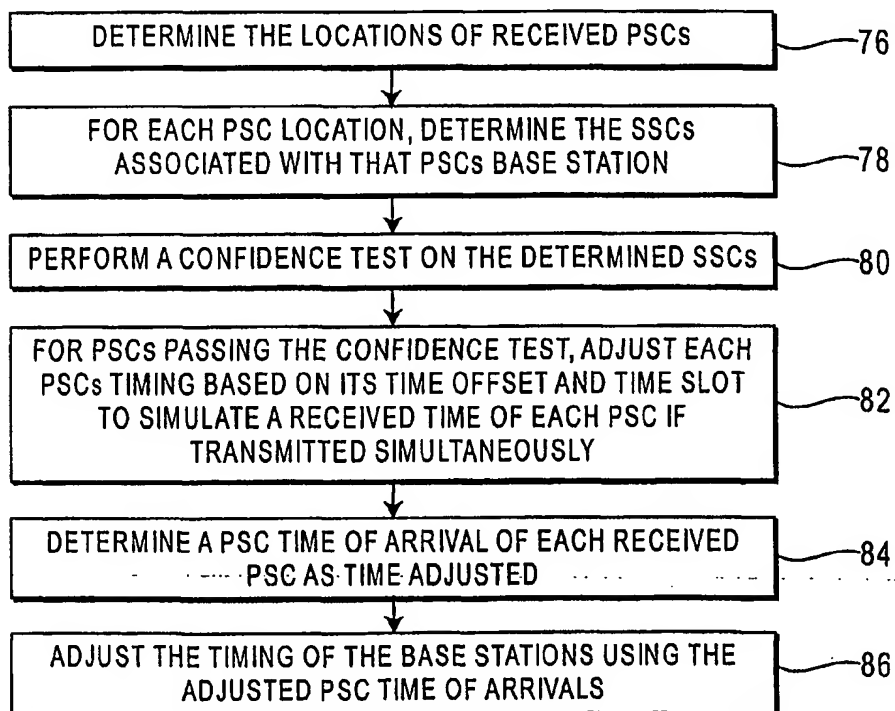

4/4

**FIG. 6****FIG. 7**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ ~~FADED~~ TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ ~~GRAY~~ SCALE DOCUMENTS
- ☒ ~~LINES~~ OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**